
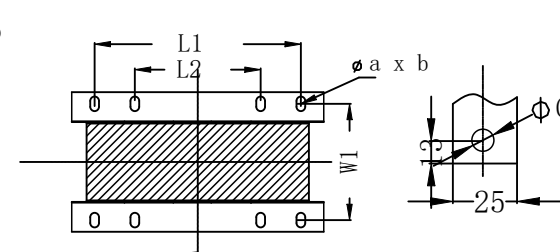
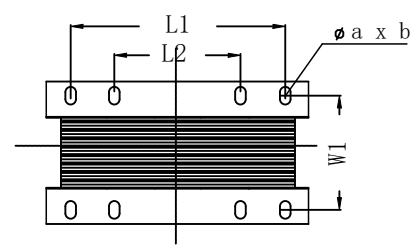
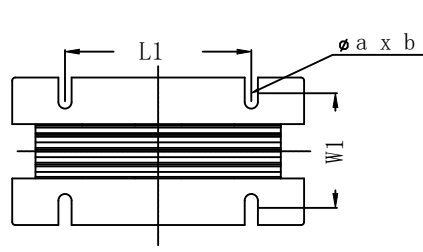
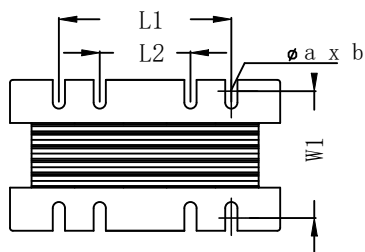
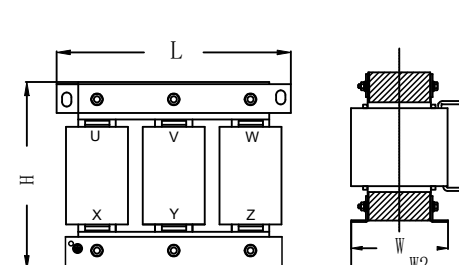
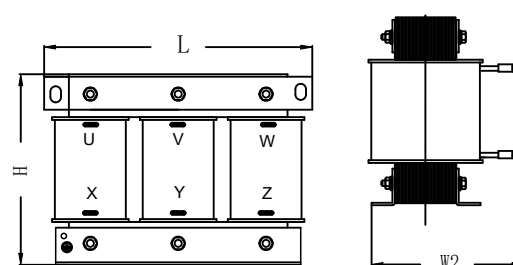
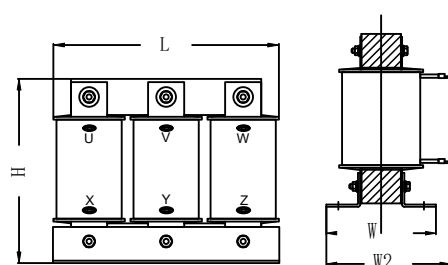


Inversun 3 phase Ac Output Reactor 3% Recommended for distance of motor line for up to 350 meters																			
 Model Number	Power (KW)	Current (A)	Inductance (mH)	weight (Kg)	Insulation Type	Frequency (HZ)	Winding Material	Voltage Drop	Rated Voltage (V)	Pattern	L	H	W	L1	L2	W1	W2	a*b	c
IOCR0015A1M41C	5.5	15	1.397	4.3	F, H	50	Cu	3%	380-400	A	155	165	85	95	55	63		4-6x15	
IOCR0020A1M05C	7.5	20	1.048	5.4	F, H	50	Cu	3%	380-400		155	165	100	95	55	76		4-6x15	
IOCR0030A0M69C	11	30	0.698	10	F, H	50	Cu	3%	380-400	B	195	165	120	120		90	160	4-8.5x20	
IOCR0040A0M54C	15	40	0.524	11	F, H	50	Cu	3%	380-400		195	165	120	120		90	160	4-8.5x20	
IOCR0050A0M42C	18.5	50	0.419	11.9	F, H	50	Cu	3%	380-400		195	165	125	120		95	168	4-8.5x20	
IOCR0060A0M36C	22	60	0.349	12.75	F, H	50	Cu	3%	380-400		195	165	130	120		100	175	4-8.5x20	
IOCR0080A0M26C	30	80	0.262	19.55	F, H	50	Cu	3%	380-400	C	250	195	130	182		104	180	4-11x18	
IOCR0090A0M23C	37	90	0.233	21.9	F, H	50	Cu	3%	380-400		250	195	140	182		114	195	4-11x18	
IOCR0120A0M17C	45	120	0.175	24.2	F, H	50	Cu	3%	380-400		250	195	140	182		114	215	4-11x18	
IOCR0150A0M14C	55	150	0.140	33.05	F, H	50	Cu	3%	380-400		290	250	140	214	150	128	225	8-11x18	
IOCR0200A0M10C	75	200	0.105	40.6	F, H	50	Cu	3%	380-400	D	290	265	138	214	150	112	215	8-11x18	11

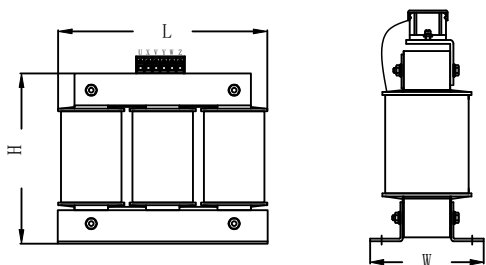

Pattern A

Pattern B

Pattern C

Pattern D